


227 IEC 06(RV) Single Core Non-sheathed Cables

227 IEC 06(RV) 单芯软导体无护套电线

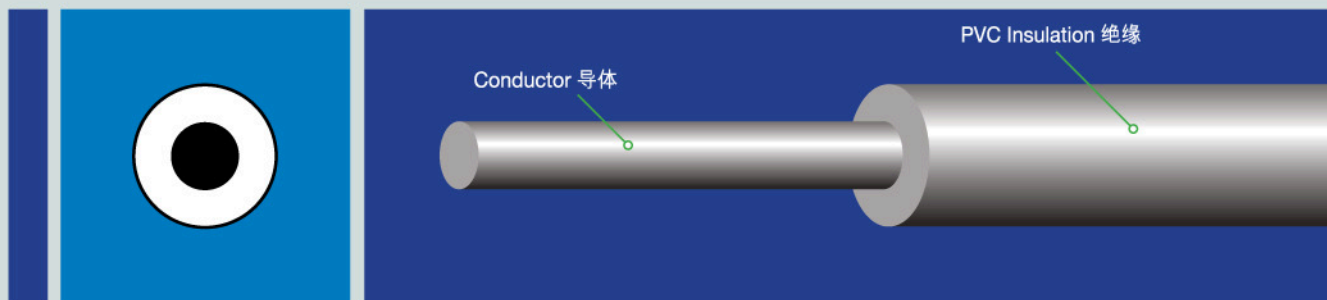

CCC A001289 GB5023 227 IEC 06(RV) 300/500V XXmm² **LTK**

| Part No. 型号 | Conductor 导体 | | | Insulation 绝缘 | | Conductor Resistance 导体电阻 | | Insulation Resistance 绝缘电阻 (70°C) (MΩ • km) |
|----------------|----------------------------------|----------------------------|--------------------|-------------------------|--------------------|-------------------------------|-------------------------------|---|
| | Area 截面 (mm ²) | Construction 结构 (mm) | Dia. 外径 (mm) | Thickness 厚度 (mm) | Dia. 外径 (mm) | Bare Copper 裸铜电阻 (Ω/km) | ST* Copper 镀锡铜电阻 (Ω/km) | |
| 227IEC06-001 | 0.5 | 28/0.15 | 0.91 | 0.62 | 2.15 | 39.0 | 40.1 | 0.013 |
| 227IEC06-002 | 0.75 | 24/0.20 | 1.13 | 0.64 | 2.40 | 26.0 | 26.7 | 0.011 |
| 227IEC06-003 | 1.0 | 32/0.19 | 1.30 | 0.62 | 2.54 | 19.5 | 20.0 | 0.010 |

* ST - Stranded Tinned Copper

Product Description

- Rated Temperature: 70°C
- Rated Voltage: 300/500V
- Reference standard: GB 5023.3-1997
- Stranded tinned or bare copper conductor
- Lead-free PVC insulation
- Uniform insulation thickness to ensure easy stripping and cutting

Application

For internal wiring of electronic and electrical equipment or power supply cord.

产品说明

- 额定温度：70°C
- 额定电压：300/500V
- 参考标准：GB 5023.3-1997
- 镀锡纹或裸纹软铜线导体
- 无铅聚氯乙烯绝缘
- 绝缘厚度均匀，方便剥皮及剪裁

应用

用于电子，电器设备内部连线或一般电源线。