


227 IEC 52(RVV) PVC Jacketed Cables

227 IEC 52(RVV) PVC 护套电缆

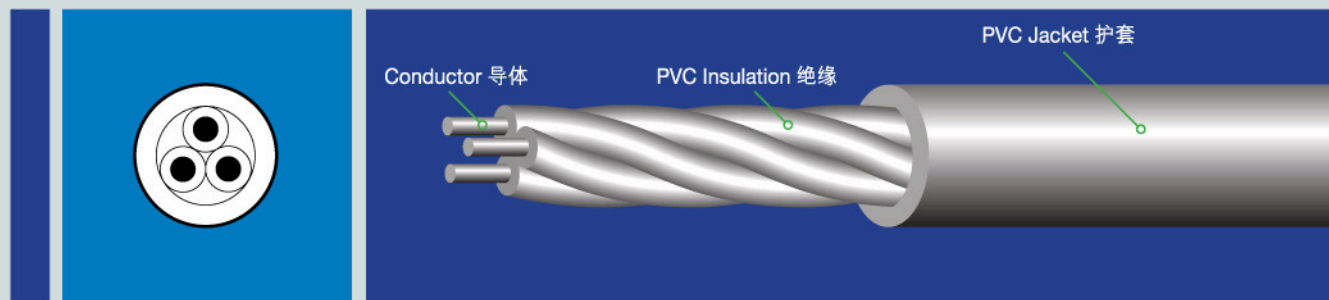

CCC A001289 GB2023 227 IEC 52(RVV) 300/300V XXmm² **LK**

	Part No. 型号	nXArea 芯数X截面 (mm ²)	Conductor 导体		Insulation 绝缘		Outer Diameter 成品外径		Conductor Resistance 导体电阻		Insulation Resistance 绝缘电阻 (70°C) (MΩ • km)
			Construction 结构 (mm)	Dia. 外径 (mm)	Thickness 厚度 (mm)	Dia. 外径 (mm)	Min. 最小 (mm)	Max. 最大 (mm)	Bare Copper 裸铜电阻 (Ω/km)	ST* Copper 镀锡铜电阻 (Ω/km)	
	227IEC52-001	2x0.5	28/0.15	0.91	0.52	1.95	4.80	6.00	39.0	40.1	0.012
	227IEC52-002	2x0.75	24/0.20	1.13	0.52	2.16	5.20	6.40	26.0	26.7	0.010
	227IEC52-003	3x0.5	28/0.15	0.91	0.52	1.95	5.00	6.20	39.0	40.1	0.012
	227IEC52-004	3x0.75	24/0.20	1.13	0.52	2.16	5.40	6.80	26.0	26.7	0.010

* ST - Stranded Tinned Copper

Product Description

- Rated Temperature: 70°C
- Rated Voltage: 300/300V
- Reference standard: GB 5023.5-1997
- Stranded tinned or bare copper conductor
- Lead-free PVC insulation
- Lead-free PVC jacket

Application

For control cable or power supply cable of electronic and electrical equipment.

产品说明

- 额定温度：70°C
- 额定电压：300/300V
- 参考标准：GB 5023.5-1997
- 镀锡绞或裸绞软铜线导体
- 无铅聚氯乙烯绝缘
- 无铅聚氯乙烯护套

应用

用于电子，电器设备控制线或电源线。