


Flexible Shielded Power Supply PVC Jacketed Cables

超柔软屏蔽PVC护套动力电缆

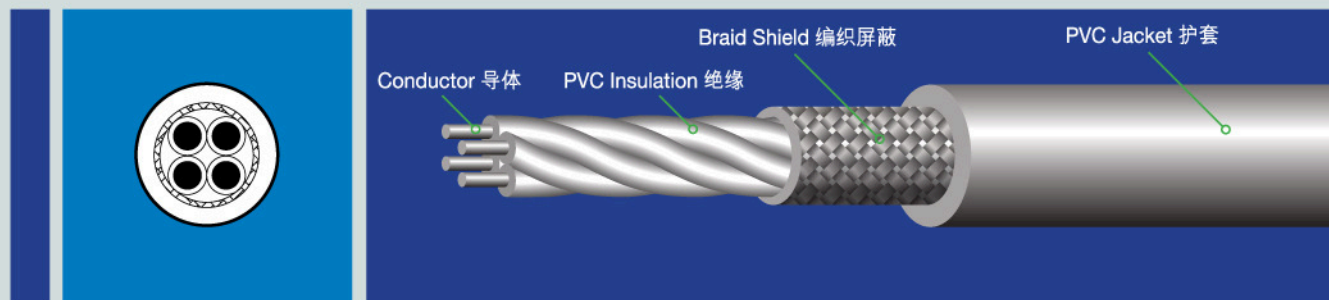

Part No. 型号	Conductor 导体			Insulation 绝缘		Outer Diameter 成品外径 (mm)	Conductor Resistance 导体电阻 (Ω/km)
	Area 截面 (mm ²)	Construction 结构 (mm)	Dia. 外径 (mm)	Thickness 厚度 (mm)	Dia. 外径 (mm)		
SMPPVC-001	4x4	81/0.25	2.59	1.51	5.60	18.30	4.95
SMPPVC-002	4x6	7/18/0.25	3.54	1.53	6.60	20.80	3.30
SMPPVC-003	4x10	7/30/0.25	4.58	1.61	7.80	23.80	1.91
SMPPVC-004	4x16	7/47/0.25	5.74	1.63	9.00	26.80	1.21
SMPPVC-005	4x25	7/73/0.25	7.17	1.67	10.50	30.80	0.780
SMPPVC-006	4x35	19/37/0.25	8.49	2.01	12.50	35.80	0.554
SMPPVC-007	4x50	19/54/0.25	10.26	2.52	15.30	42.80	0.386

Product Description

- Rated Temperature: -40°C~105°C
- Rated Voltage: 600/1000V
- Stranded bare copper conductor
- Lead-free PVC insulation
- Tinned or bare copper wire braiding shield
- Braiding coverage: 80%, 85%, 90%, 95%
- Lead-free PVC jacket
- Passed vertical flame test
- Super flexible
- Ultraviolet resistant
- Anti-rat & anti-termite

Application

For power supply cable of equipment.

产品说明

- 额定温度：-40°C~105°C
- 额定电压：600/1000V
- 裸绞软铜线导体
- 无铅聚氯乙烯绝缘
- 镀锡或裸铜丝编织屏蔽
- 编织密度：80%，85%，90%，95%
- 无铅聚氯乙烯护套
- 通过垂直耐燃试验
- 具有超柔软特性
- 具有耐紫外线特性
- 具有防鼠，防白蚁特性

应用

用于设备动力电缆。