


Serial Attached SCSI (SAS) Cables

Serial Attached SCSI (SAS) 电缆

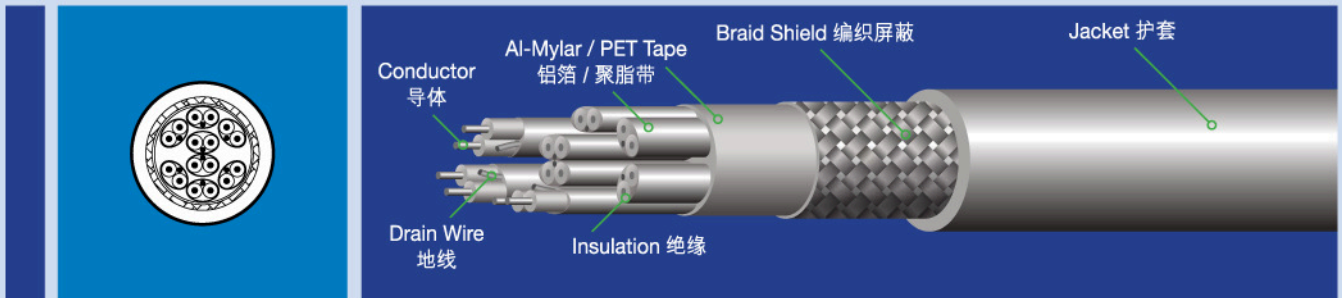

Part No. 型号	Conductor 导体	No. of Pairs 对数	Insulation 绝缘		Individual Shield 单独屏蔽	Overall Shield 外屏蔽	Jacket 护套		Delay 延时 (ns/m)	Delay Skew 延时差 (ps/m)		Max. Attenuation 最大衰减														
			Material 材质	Diameter 线径 (mm)			Material 材质	Diameter 线径 (mm)		Intra 对内	Inter 对间	Frequency 频率 (GHz)	(dB/m)													
341318	30 AWG 1/0.254 SPC*	8	Foam PE	0.74	Al-Mylar/ PET Tape	Al-Mylar/ TC** Braiding	PVC/ Halogen- free	6.6	4.5	10	50	0.625	1.24													
341319	28 AWG 1/0.32 SPC*			0.92				7.6		10	50	0.625	0.88													
												1.25	1.3													
												1.5	1.45													
												2.5	1.98													
												3.75	2.54													
341320	26 AWG 1/0.41 SPC*			1.14				8.8		10	50	0.625	0.72													
												1.25	1.07													
												1.5	1.19													
												2.5	1.62													
												3.75	2.08													
341321	24 AWG 1/0.51 SPC*			1.42				10.2		10	50	0.625	0.61													
												1.25	0.9													
												1.5	1													
												2.5	1.37													
												3.75	1.76													

* SPC - Silver Plated Copper 镀银铜线 / ** TC - Tinned Copper 镀锡铜线

Product Description

- Impedance: 100±5Ω
- Silver plated copper conductor
- Foam PE insulation
- Al-Mylar, copper braiding
- PVC or Halogen-free jacket

Application

For communication and signal control systems

产品说明

- 阻抗：100±5Ω
- 镀银铜线导体
- 发泡聚乙烯绝缘
- 铝箔，编织屏蔽
- 聚氯乙烯或无卤物料护套

应用

适用于通信设备及控制系统