


SATA Cables

SATA 电缆

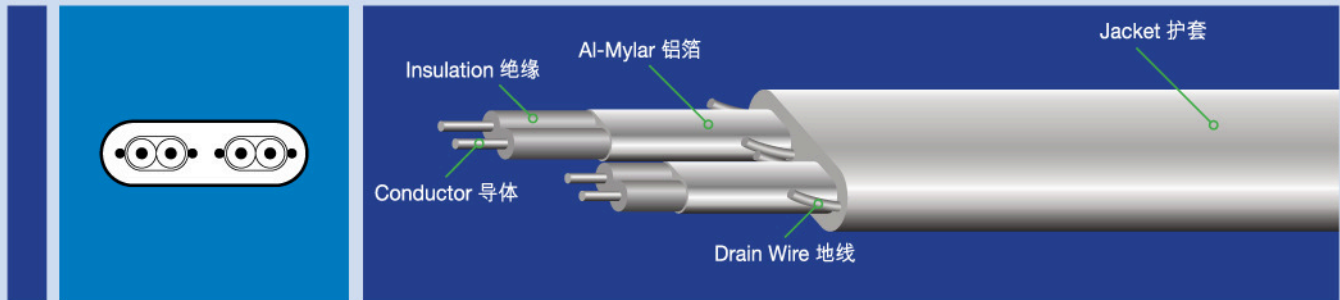

Part No. 型号	Conductor 导体	No. of Pairs 对数	Insulation 绝缘		Individual Shield 单独屏蔽	Jacket 护套		Delay 延时 (ns/m)	Delay Skew 延时差 (ps/m)		Nom. Attenuation 成品衰减	
			Material 材质	Diameter 线径 (mm)		Material 材质	Diameter 线径 (mm)		Intra 对内	Inter 对间	Frequency 频率 (MHz)	(dB/m)
341322	26 AWG 1/0.41 TC*	2	Foam PE	1.1	Al-Mylar	PVC	2.2 x 7.9	4.25	10	50	0.75	0.9
											1.5	1.5
											4.5	3.2
341323	26 AWG 1/0.41 TC*	2	Foam PE	1.1	Al-Mylar	Halogen-free	3.2 x 8.5	4.25	10	50	0.75	0.9
											1.5	1.5
											4.5	3.2

* TC - Tinned Copper 镀锡铜线

Product Description

- Impedance: 100±5Ω
- Tinned copper conductor
- Foam PE insulation
- Al-Mylar or copper braiding
- PVC or Halogen-free jacket

Application

For communication and signal control systems

产品说明

- 阻抗：100±5Ω
- 镀锡铜线导体
- 发泡聚乙烯绝缘
- 铝箔屏蔽或编织
- 聚氯乙烯或无卤物料护套

应用

适用于通信设备及控制系统