


UL 1284 Hook-up Wires

UL 1284 连接线

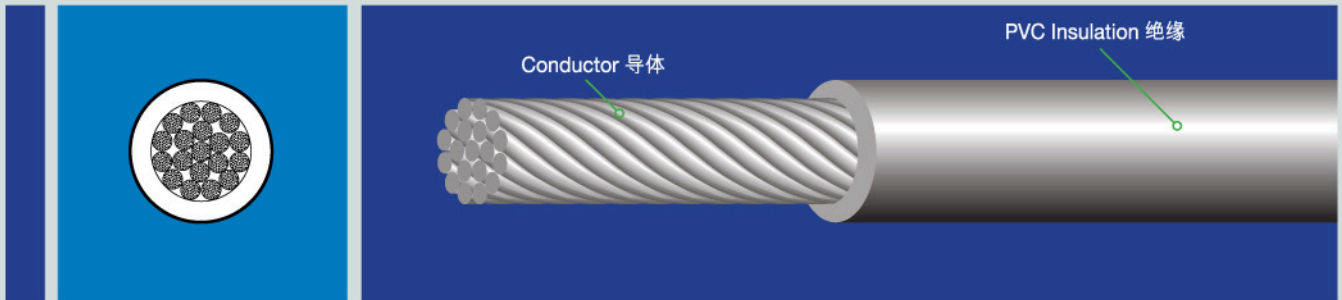

E148000 AWM STYLE 1284 No.AWG 105°C 600V VW-1- - - c AWM I A/B 105°C 600V FT4 -F- -LF- PCXX

Part No. 型号	Conductor 导体				Insulation 绝缘		Conductor Resistance 导体电阻 (Ω /km)
	AWG 线规	Construction 结构 (mm)	Area 截面 (mm ²)	Dia. 外径 (mm)	Thickness 厚度 (mm)	Dia. 外径 (mm)	
1284-001	1	19/44/0.254	42.36	9.70	2.30	14.30	0.475
1284-002	1/0	19/55/0.254	52.95	10.60	2.45	15.50	0.380
1284-003	2/0	19/70/0.254	67.39	12.00	2.45	16.90	0.299
1284-004	3/0	19/88/0.254	84.72	13.50	2.45	18.40	0.238
1284-005	4/0	37/57/0.254	106.87	15.10	2.55	20.20	0.188

Product Description

- Rated Temperature: -40°C~105°C
- Rated Voltage: 600V
- Reference standard: UL 758, UL 1581 & CSA C22.2 No.210.2
- Stranded tinned copper conductor
- Lead-free PVC insulation
- Uniform insulation thickness to ensure easy stripping and cutting
- Passed UL VW-1 & CSA FT4 vertical flame test
- Super flexible
- Ultraviolet resistant
- Anti-rat & anti-termite

Application

For internal wiring of electronic and electrical equipment or power supply cord.

产品说明

- 额定温度：-40°C~105°C
- 额定电压：600V
- 参考标准：UL 758, UL 1581 及 CSA C22.2 No.210.2
- 镀锡绞合软铜线导体
- 无铅聚氯乙烯绝缘
- 绝缘厚度均匀，方便剥皮及剪裁
- 通过 UL VW-1 及 CSA FT4 垂直耐燃试验
- 具有超柔软特性
- 具有耐紫外线特性
- 具有防鼠，防白蚁特性

应用

用于电子，电器设备内部连线或一般电源线。