


# UL 20234 PU Jacketed Machine Tool Cables

## UL 20234 PU 护套机床用线

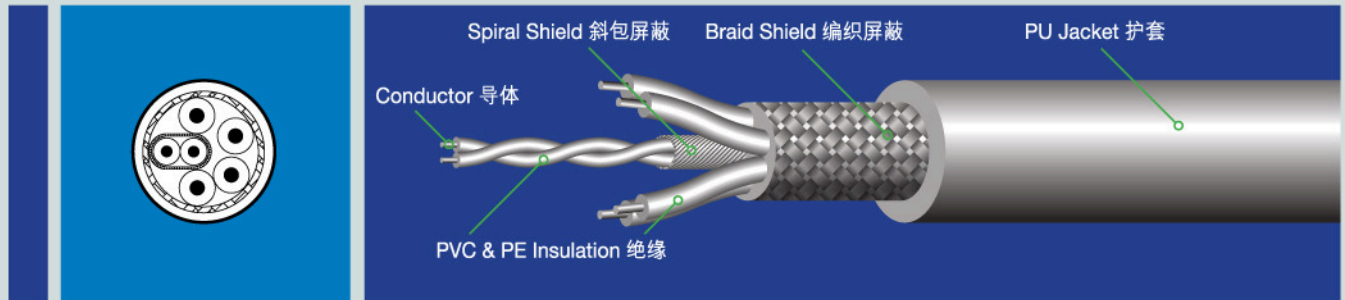

E148000-C AWM STYLE 20234 80°C 600V

Part No. 型号	No. of Cores 芯数	Conductor 导体				Insulation 绝缘		Conductor Resistance 导体电阻 ( $\Omega$ /km)
		AWG 线规	Construction 结构 (mm)	Area 截面 (mm <sup>2</sup> )	Dia. 外径 (mm)	Thickness 厚度 (mm)	Dia. 外径 (mm)	
20234-600-1	3C	12	127/0.20	4.00	2.60	0.95	4.50	4.6
	1C	12	127/0.20	4.00	2.60	0.95	4.50	4.6
	1P	18	32/0.20	1.00	1.30	0.40	2.10	19.5
20234-600-2	4C	12	127/0.20	4.00	2.60	0.95	4.50	4.6
	1C	12	127/0.20	4.00	2.60	0.95	4.50	4.6
	1P	18	32/0.20	1.00	1.30	0.40	2.10	19.5
20234-600-3	5C	12	127/0.20	4.00	2.60	0.95	4.50	4.6
	1C	12	127/0.20	4.00	2.60	0.95	4.50	4.6
	1P	18	32/0.20	1.00	1.30	0.40	2.10	19.5
20234-600-4	6C	12	127/0.20	4.00	2.60	0.95	4.50	4.6
	1C	12	127/0.20	4.00	2.60	0.95	4.50	4.6
	1P	18	32/0.20	1.00	1.30	0.40	2.10	19.5
20234-600-5	7C	12	127/0.20	4.00	2.60	0.95	4.50	4.6
	1C	12	127/0.20	4.00	2.60	0.95	4.50	4.6
	1P	18	32/0.20	1.00	1.30	0.40	2.10	19.5

### Product Description

- Rated Temperature: 80°C
- Rated Voltage: 600V
- Reference standard: UL758, UL1581
- Stranded bare copper conductor
- Lead-free PVC & PE insulation
- Tinned copper spiral shield for paired wire, overall braid shield
- Lead-free oil resistant, Flexible, Flame retardant, PU jacket

### Application

For internal wiring or external interconnection of electronic equipment.

### 产品说明

- 额定温度：80°C
- 额定电压：600V
- 参考标准：UL 758, UL 1581
- 裸绞合软铜线导体
- 无铅聚氯乙烯及聚乙烯绝缘
- 对绞芯线以镀锡铜丝斜包为屏蔽，以镀锡铜丝编织为总屏蔽
- 无铅，耐油，柔性，阻燃聚氨酯护套

### 应用

用于电子设备内部及外部连线。