


# UL 20234 Shielded Machine Tool Cables

## UL 20234 屏蔽机床用线

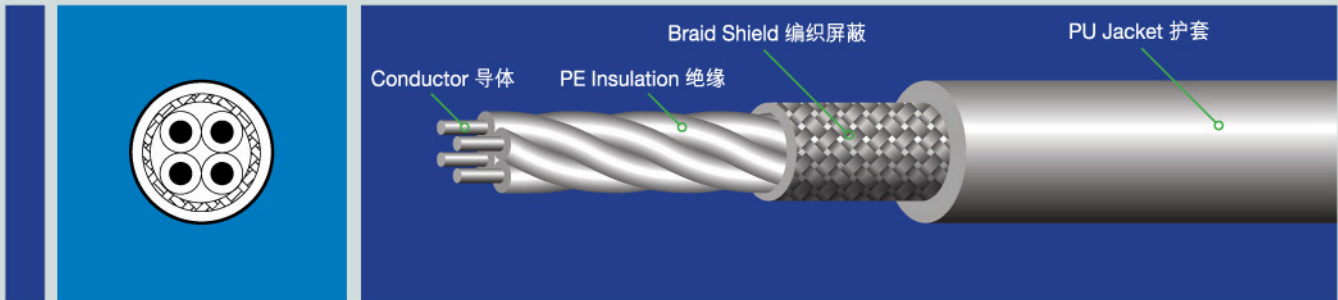

E148000-C  AWM STYLE 20234 80°C 600V 

| Part No.<br>型号 | No. of Cores<br>芯数 | Conductor 导体 |                            |                                  |                    | Insulation 绝缘           |                    | Conductor Resistance<br>导体电阻<br>(Ω/km) |
|----------------|--------------------|--------------|----------------------------|----------------------------------|--------------------|-------------------------|--------------------|--|
|                |                    | AWG<br>线规    | Construction<br>结构<br>(mm) | Area<br>截面<br>(mm <sup>2</sup> ) | Dia.<br>外径<br>(mm) | Thickness<br>厚度<br>(mm) | Dia.<br>外径<br>(mm) |  |
| 20234-601-1    | 4C                 | 16           | 48/0.20                    | 1.50                             | 1.60               | 0.95                    | 3.50               | 12.1                                   |
| 20234-601-2    | 5C                 | 16           | 48/0.20                    | 1.50                             | 1.60               | 0.95                    | 3.50               | 12.1                                   |
| 20234-601-3    | 6C                 | 16           | 48/0.20                    | 1.50                             | 1.60               | 0.95                    | 3.50               | 12.1                                   |
| 20234-601-4    | 7C                 | 16           | 48/0.20                    | 1.50                             | 1.60               | 0.95                    | 3.50               | 12.1                                   |
| 20234-601-5    | 8C                 | 16           | 48/0.20                    | 1.50                             | 1.60               | 0.95                    | 3.50               | 12.1                                   |

### Product Description

- Rated Temperature: 80°C
- Rated Voltage: 600V
- Reference standard: UL758, UL1581
- Stranded bare copper conductor
- Lead-free PE insulation
- Tinned copper wire overall braid shield
- Lead-free oil resistant, Flexible, Flame retardant, PU jacket

### Application

For internal wiring or external interconnection of electronic equipment.

### 产品说明

- 额定温度：80°C
- 额定电压：600V
- 参考标准：UL 758, UL 1581
- 裸绞合软铜线导体
- 无铅聚乙烯绝缘
- 镀锡铜丝总编织屏蔽
- 无铅，耐油，柔性，阻燃聚氨酯护套

### 应用

用于电子设备内部及外部连线。