


UL 2586 Multi-conductor Computer Cables

UL 2586 多芯电脑线

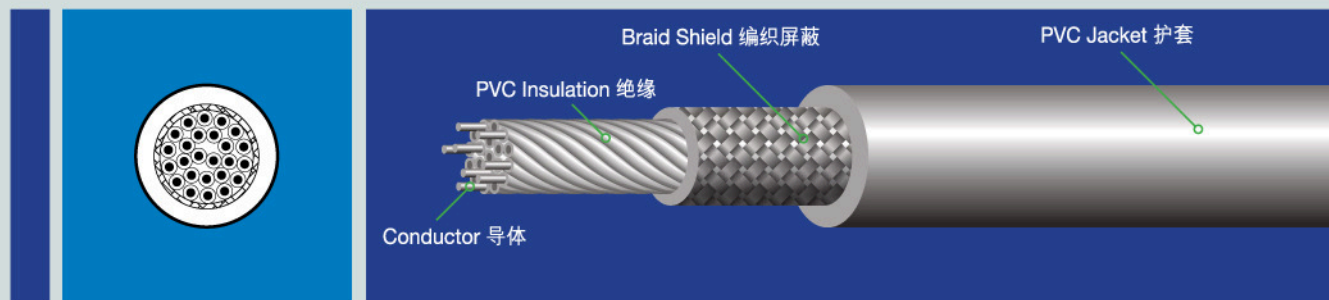

E148000 AWM STYLE 2586 No.AWG 105°C 600V VW-1---c AWM I/II A/B 105°C 600V FT1 -LF- PCXX

Part No. 型号	No. of Cores 芯数	Conductor 导体				Insulation 绝缘		Conductor Resistance 导体电阻 (Ω /km)
		AWG 线规	Construction 结构 (mm)	Area 截面 (mm ²)	Dia. 外径 (mm)	Thickness 厚度 (mm)	Dia. 外径 (mm)	
2586-001	2~50	30	7/0.10	0.055	0.30	0.41	1.12	354.33
2586-002	2~50	28	7/0.127	0.089	0.38	0.41	1.20	223.75
2586-003	2~40	26	7/0.16	0.14	0.48	0.41	1.30	139.76
2586-004	2~30	24	11/0.16	0.22	0.61	0.41	1.43	88.36
2586-005	2~30	22	17/0.16	0.34	0.76	0.41	1.58	60.16
2586-006	2~30	20	26/0.16	0.52	0.94	0.41	1.76	37.56
2586-007	2~20	18	41/0.16	0.82	1.18	0.41	2.00	24.82
2586-008	2~16	16	26/0.254	1.32	1.50	0.41	2.32	15.06
2586-009	2~10	14	41/0.254	2.08	1.88	0.51	2.90	9.65
2586-010	2~7	12	65/0.254	3.29	2.36	0.79	3.94	5.82
2586-011	2~7	10	66/0.32	5.31	3.00	0.79	4.58	3.41
2586-012	2~5	8	7/24/0.254	8.51	4.29	1.66	7.60	2.37
2586-013	2~5	6	7/38/0.254	13.48	5.40	1.67	8.73	1.49
2586-014	2~5	4	7/60/0.254	21.28	6.80	1.65	10.10	0.947
2586-015	2~5	2	19/35/0.254	33.70	8.60	1.68	11.95	0.600
2586-016	2~5	1	19/44/0.254	42.36	9.70	2.30	14.30	0.475

Product Description

- Rated Temperature: 105°C
- Rated Voltage: 600V
- Reference standard: UL 758, UL 1581 & CSA C22.2 No.210.2
- Stranded tinned copper conductor
- Lead-free PVC insulation
- Tinned copper wire braiding shield (Optional)
- Braiding coverage: 70%, 80%, 85%, 90%, 95%
- Lead-free PVC jacket
- Passed UL VW-1 & CSA FT1 vertical flame test

Application

For internal wiring or external interconnection of electronic equipment or power supply cable of equipment.

产品说明

- 额定温度：105°C
- 额定电压：600V
- 参考标准：UL 758, UL 1581 及 CSA C22.2 No.210.2
- 镀锡绞合软铜线导体
- 无铅聚氯乙烯绝缘
- 镀锡铜丝编织屏蔽 (可选)
- 编织密度：70%, 80%, 85%, 90%, 95%
- 无铅聚氯乙烯护套
- 通过 UL VW-1 及 CSA FT1 垂直耐燃试验

应用

用于电子设备内部及外部连线或设备电源线。